


Cylinder 3 stage front end with outer cover

****ALLOW 50mm TO REMOVE CAP FOR SERVICING**

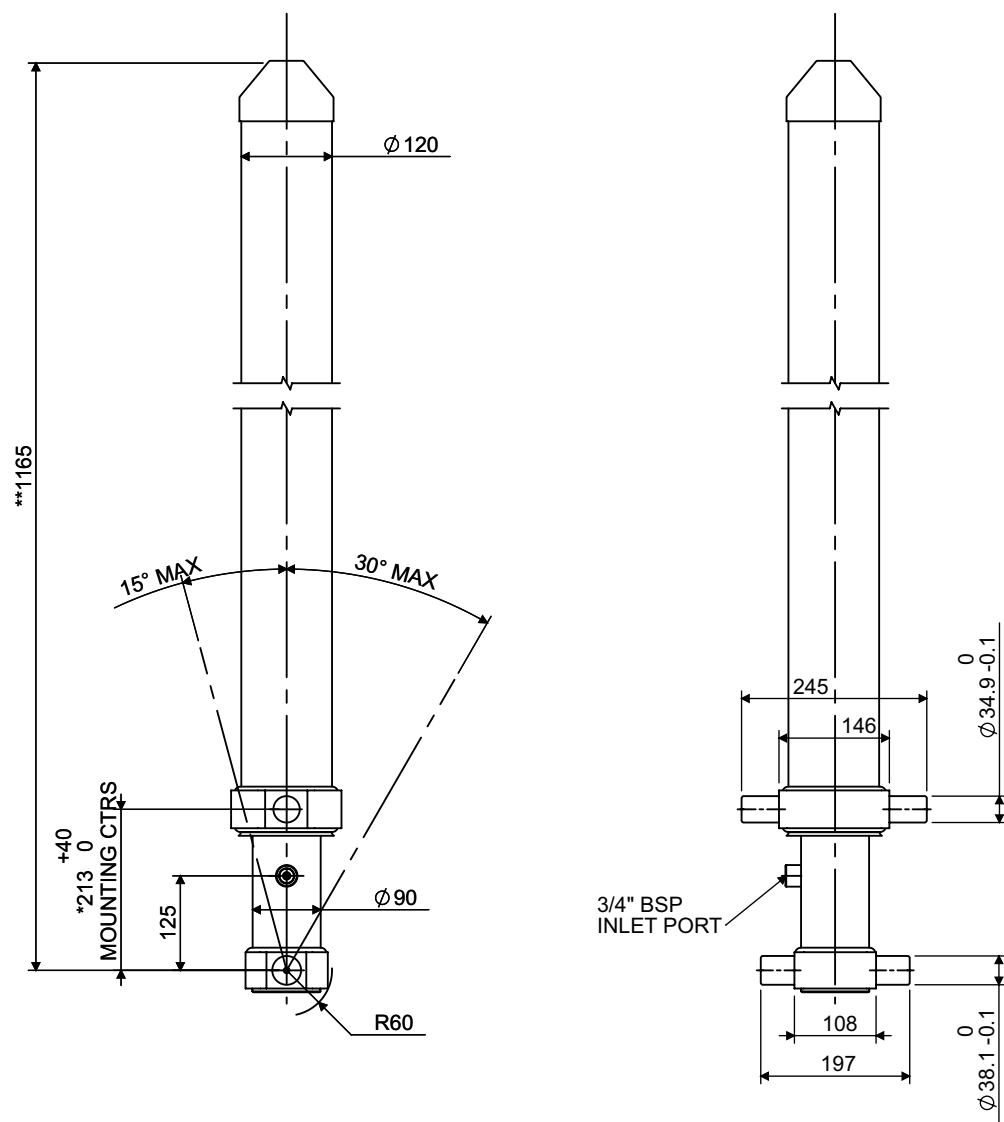

*Includes 10mm Pull Out.

CS070032595N12A28

SPECIFICATION		TIPPING CAPACITY : 7-10 TONNES***		
Stage	Diameter	Length	Stroke	Swept Volume
-	-	-	-	-
-	-	-	-	-
OUTER COVER	120	941	-	-
0	90	1067	-	-
1	75	1037	862	4
2	60	1038	863	2
3	45	1060	870	1
Total (+5/-10)			2595	7
Final stroke reduced by	0	Priming Volume		2
Cylinder Mass (Kg)	56	Total Volume (Litres)		9
Maximum Pressure (Bar)	175	Max. first stage thrust		40 KN

***TIPPING CAPACITY AT WORKING PRESSURE

		BODY LENGTH (BL)				OH
		3500	3700	3900		
7	44°	7	42°			150
9	48°	8	45°	8	43°	450
				10	47°	750

d = 111; r = 500; Working Pressure 150 bar

Tipping angle (T)

Body + payload mass, W (tonne)

NOTES

1. This cylinder is for lifting purposes only and side load conditions should be avoided
2. Cylinder is painted in primer to RAL9005

Edbro

Hoppe-Truck-Hydraulik GmbH & Co.KG
Püßelbürener Damm 244, 49479 Ibbenbüren
Tel.: +49 (0) 5451-50230320, Fax: +49 (0) 5451-50230348
Email: info@hoppe.parts Web: www.hoppe.parts

HTH HOPPE. PARTS