


Cylinder 3 stage front end with outer cover

****ALLOW 50mm TO REMOVE CAP FOR SERVICING**

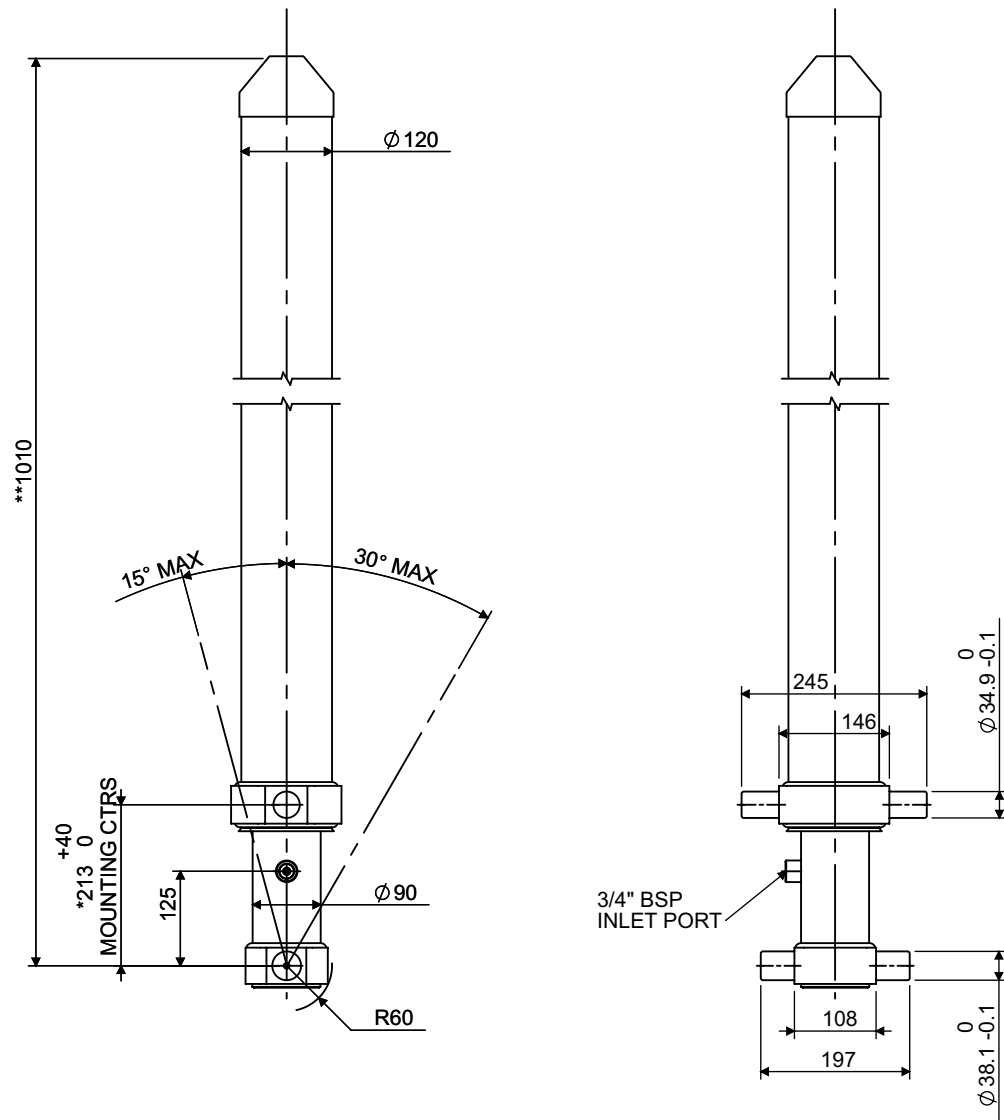

*Includes 10mm Pull Out.

CS070032130N12A28

SPECIFICATION

TIPPING CAPACITY : 7-10 TONNES***

Stage	Diameter	Length	Stroke	Swept Volume
-	-	-	-	-
-	-	-	-	-
OUTER COVER	120	786	-	-
0	90	912	-	-
1	75	882	707	3
2	60	883	708	2
3	45	905	715	1
Total (+5/-10)			2130	6
Final stroke reduced by	0	Priming Volume		1
Cylinder Mass (Kg)	49	Total Volume (Litres)		7
Maximum Pressure (Bar)	175	Max. first stage thrust		40 KN

***TIPPING CAPACITY AT WORKING PRESSURE

Body Length (BL)		BODY LENGTH (BL)				OH
		3000	3100	3200		
8	42°	7	41°			150
10	47°	10	45°	9	44°	450
						750

d = 111; r = 500; Working Pressure 150 bar

Tipping angle (T)

Body + payload mass, W (tonne)

NOTES

1. This cylinder is for lifting purposes only and side load conditions should be avoided
2. Cylinder is painted in primer to RAL9005

Edbro

Hoppe-Truck-Hydraulik GmbH & Co.KG
Püßelbürener Damm 244, 49479 Ibbenbüren
Tel.: +49 (0) 5451-50230320, Fax: +49 (0) 5451-50230348
Email: info@hoppe.parts Web: www.hoppe.parts

HTH HOPPE. PARTS