


Cylinder 3 stage front end with outer cover

****ALLOW 50mm TO REMOVE CAP FOR SERVICING**

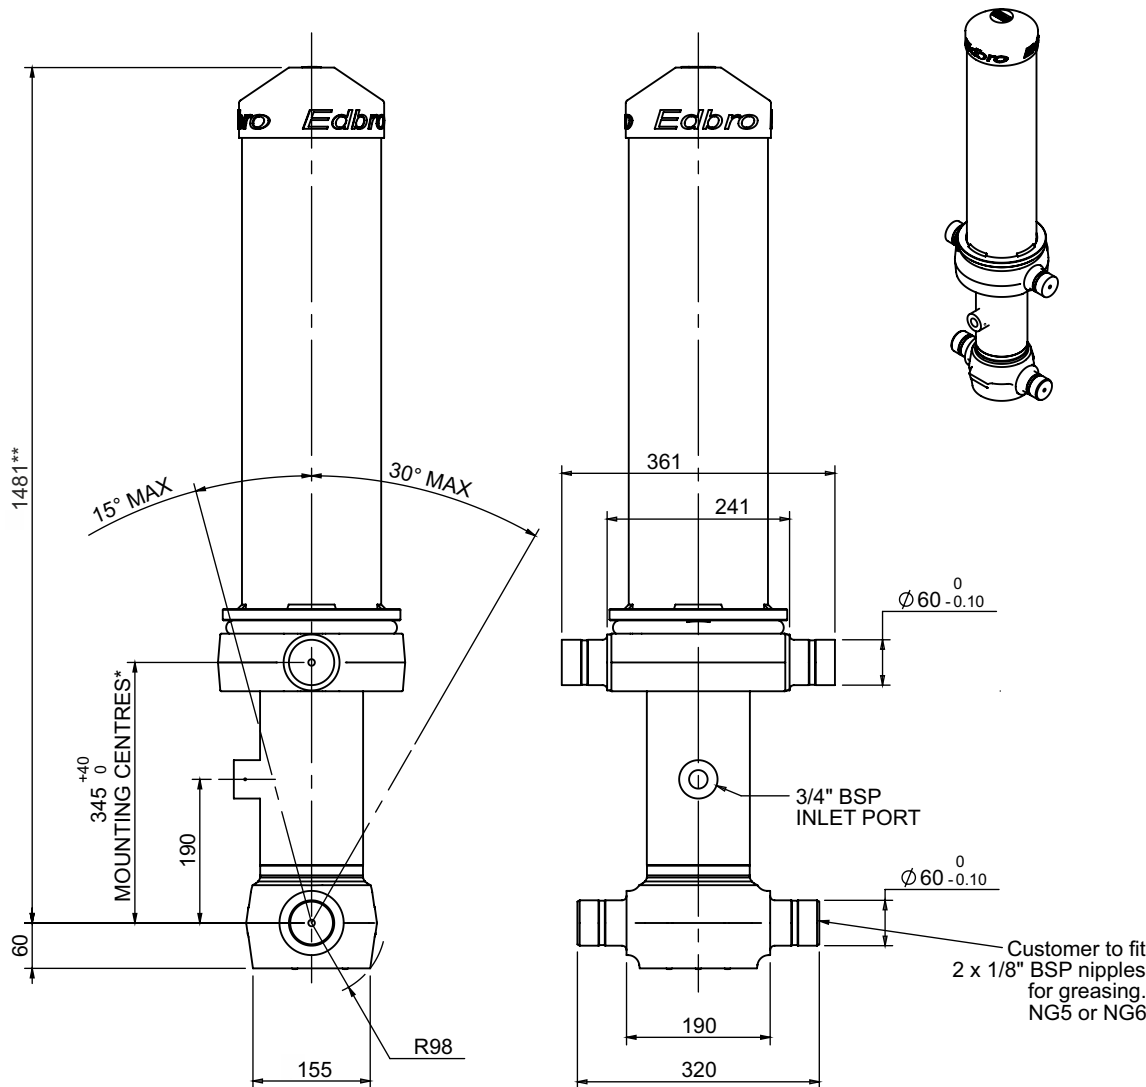

*Includes 14mm Pull Out.


CS110033644B19A11

SPECIFICATION

RATED CAPACITY : 20-32 TONNES***

Stage	Diameter	Length	Stroke	Swept Volume
-	-	-	-	-
-	-	-	-	-
Outer Cover	184	1085	-	-
0	136	1425	-	-
1	117	1390	1199	13
2	98	1390	1217	9
3	79	1390	1222	6
Final stroke reduced by	0	Total (+5/-10)	3638	28
Cylinder Mass (Kg)	119.40	Priming Volume	9.5	
Rated Pressure (Bar)	150	Total Volume (Litres)	37.5	
Maximum Pressure (Bar)	175	Max. first stage thrust	130 KN	

***TIPPING CAPACITY AT RATED PRESSURE

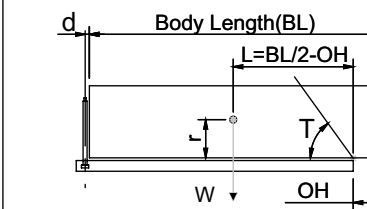

d = 178; r = 750

BODY LENGTH (BL)						OH
4500		4625		4750		
21	48°	21	46°	20	45°	150
26	51°	25	50°	24	48°	450
		32	54°	30	52°	750

Tipping angle (T)
Body + payload mass, W (tonne)

NOTES

- If hydraulic pressure is used to limit overloading, the system relief valve must be set to the Rated Pressure unless agreed otherwise by Edbro
- The system relief valve can be set to Maximum Pressure if the load is limited by other means. See RATINGS page for advice
- This cylinder is for lifting purposes only and sideload conditions must be avoided
- Cylinder is painted in primer to RAL9005

Edbro

Hoppe-Truck-Hydraulik GmbH & Co.KG
Püßelbürener Damm 244, 49479 Ibbenbüren
Tel.: +49 (0) 5451-50230320, Fax: +49 (0) 5451-50230348
Email: info@hoppe.parts Web: www.hoppe.parts

HTH HOPPE PARTS