


Cylinder 3 stage front end with outer cover

****ALLOW 50mm TO REMOVE CAP FOR SERVICING**

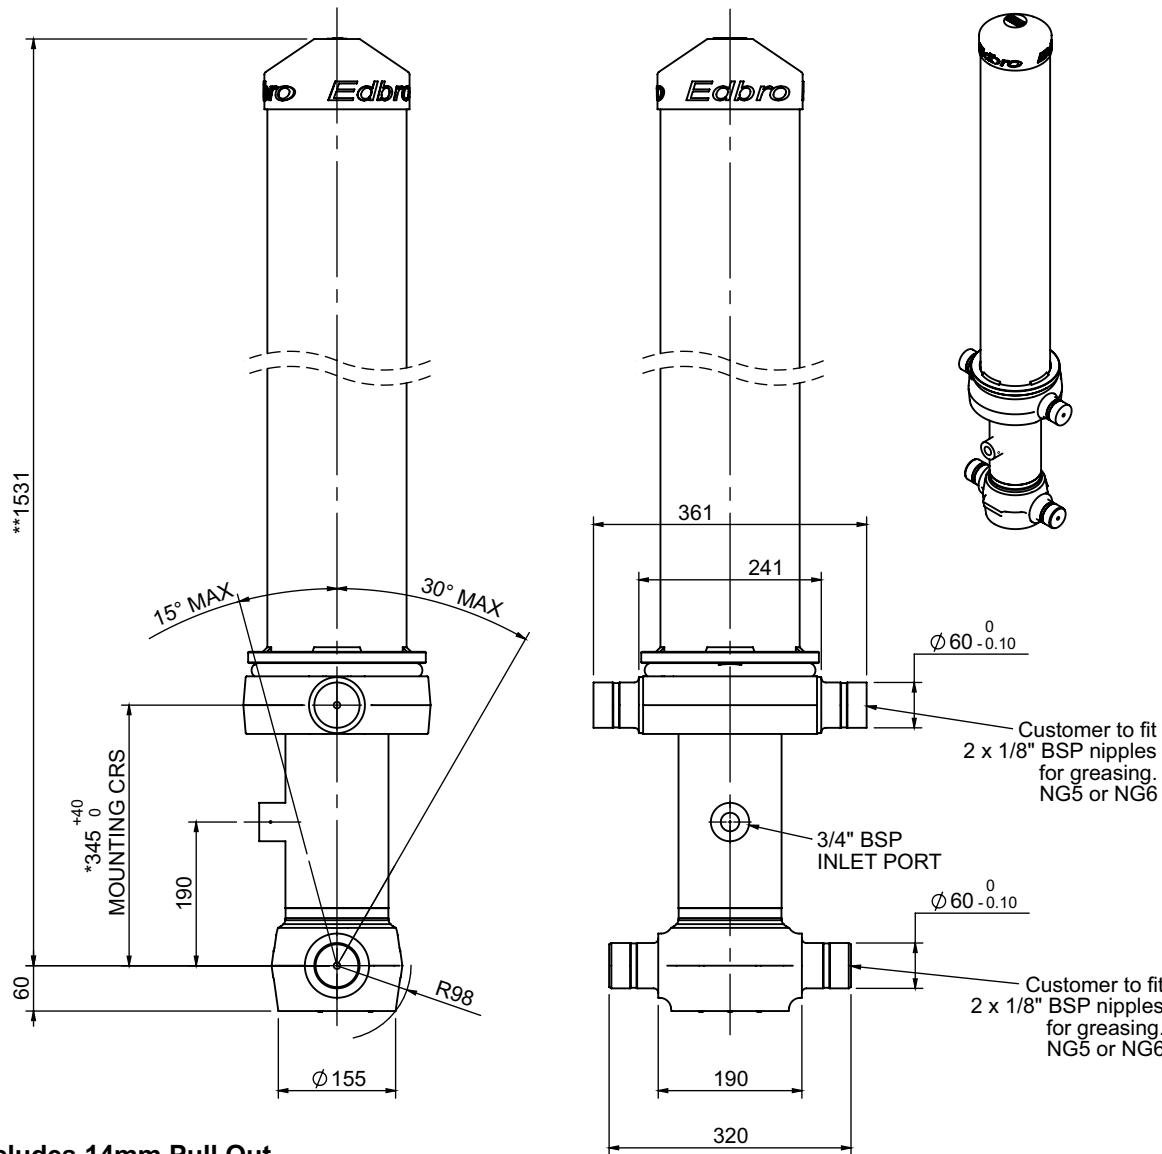

***Includes 14mm Pull Out.**

CS110033794B19A11

SPECIFICATION

TIPPING CAPACITY : 21-32 TONNES***

Stage	Diameter	Length	Stroke	Swept Volume
-	-	-	-	-
-	-	-	-	-
OUTER COVER	184	1135	-	-
0	136	1475	-	-
1	117	1440	1249	13
2	98	1440	1267	10
3	79	1440	1272	6
Total (+5/-10)			3788	29
Final stroke reduced by	0	Priming Volume		10
Cylinder Mass (Kg)	125	Total Volume (Litres)		39
Maximum Pressure (Bar)	190	Max. first stage thrust		130 KN

***TIPPING CAPACITY AT WORKING PRESSURE

Body Length (BL)		BODY LENGTH (BL)				OH
		5000	5125	5250		
22	45°	22	43°	21	42°	150
26	48°	25	46°	24	45°	450
32	51°	30	50°	29	48°	750

$d = 178$; $r = 750$; Working Pressure 150 bar
 Tipping angle (T)
 Body + payload mass, W (tonne)


NOTES

1. This cylinder is for lifting purposes only and side load conditions should be avoided
2. Cylinder is painted in primer to RAL9005

Edbro

Hoppe-Truck-Hydraulik GmbH & Co.KG
 Püßelbürener Damm 244, 49479 Ibbenbüren
 Tel.: +49 (0) 5451-50230320, Fax: +49 (0) 5451-50230348
 Email: info@hoppe.parts Web: www.hoppe.parts

HTH HOPPE PARTS

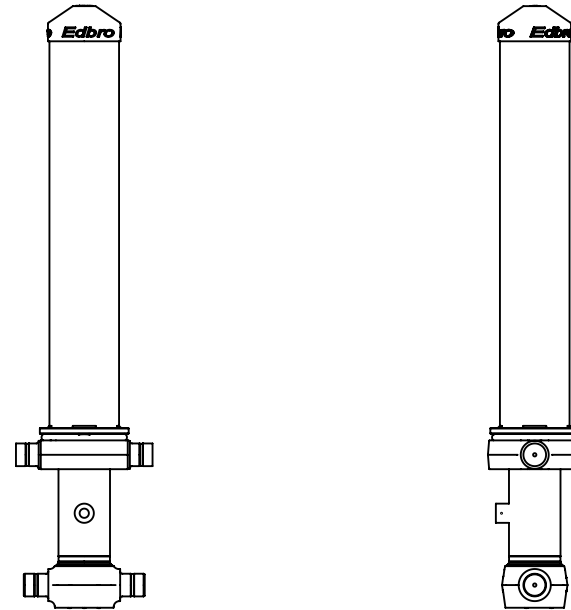

CS110033794B19A11