


Cylinder 4 stage front end with outer cover

****ALLOW 50mm TO REMOVE CAP FOR SERVICING**

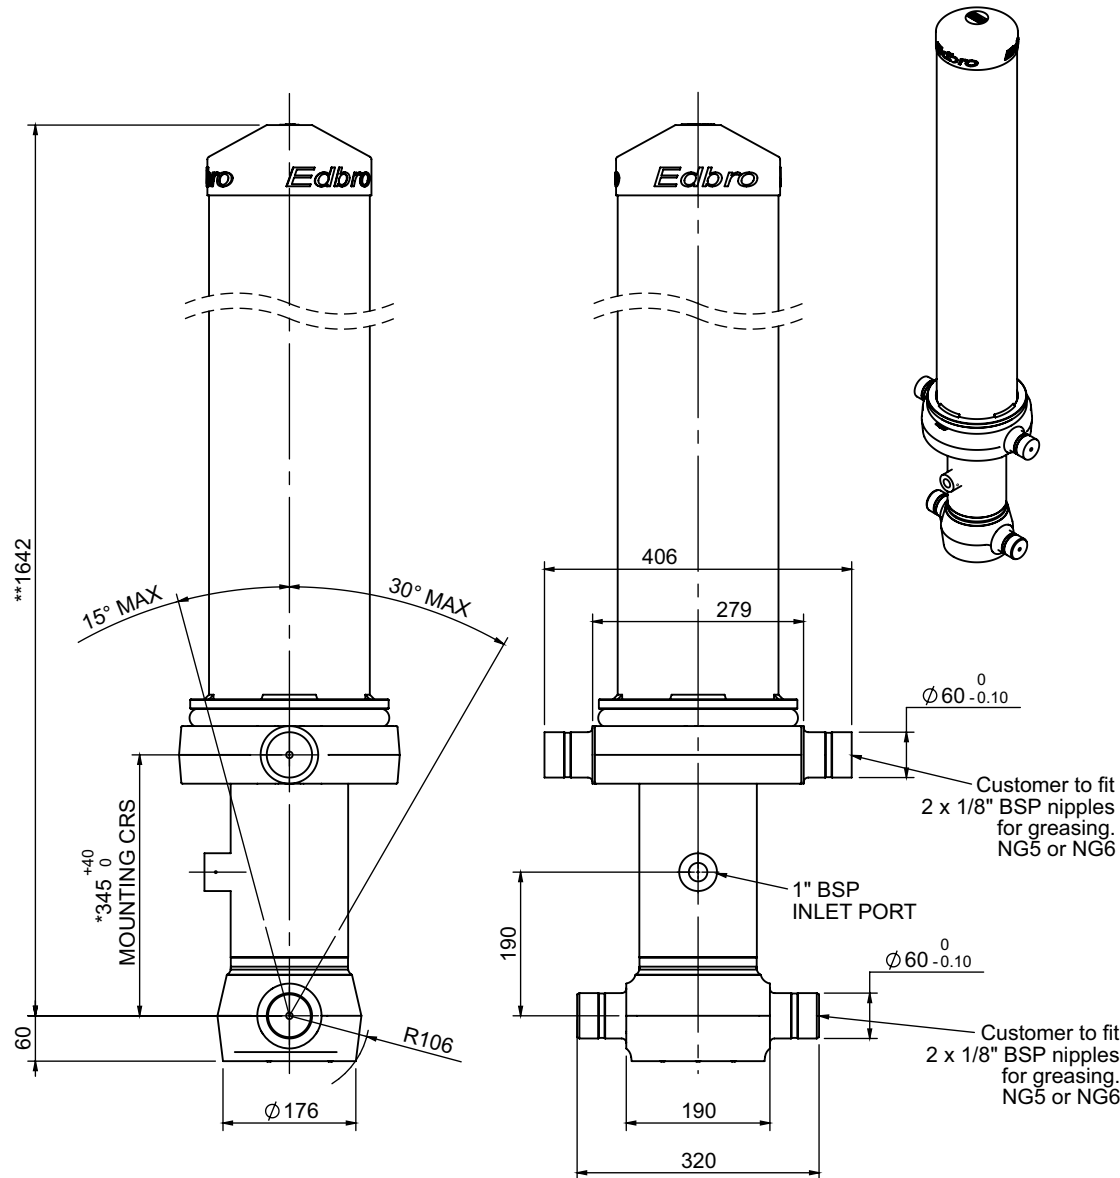

*Includes 14mm Pull Out.

CS130045441B19A11

SPECIFICATION

TIPPING CAPACITY : 23-33 TONNES***

Stage	Diameter	Length	Stroke	Swept Volume
-	-	-	-	-
OUTER COVER	213	1255	-	-
0	155	1575	-	-
1	136	1540	1333	19
2	117	1540	1362	15
3	98	1540	1367	10
4	79	1540	1372	7
Total (+5/-10)			5434	51
Final stroke reduced by	0	Priming Volume		14
Cylinder Mass (Kg)	190	Total Volume (Litres)		65
Maximum Pressure (Bar)	190	Max. first stage thrust		170 KN

***TIPPING CAPACITY AT WORKING PRESSURE

Body Length (BL)		BODY LENGTH (BL)				OH
		6750	7250	7750		
26	48°	25	44°	23	41°	150
29	50°	27	46°	25	43°	450
33	53°	30	48°	28	45°	750

d = 178; r = 750; Working Pressure 175 bar

Tipping angle (T)

Body + payload mass, W (tonne)


NOTES

1. This cylinder is for lifting purposes only and side load conditions should be avoided
2. Cylinder is painted in primer to RAL9005

Edbro

Hoppe-Truck-Hydraulik GmbH & Co.KG
Püßelbürener Damm 244, 49479 Ibbenbüren
Tel.: +49 (0) 5451-50230320, Fax: +49 (0) 5451-50230348
Email: info@hoppe.parts Web: www.hoppe.parts

HTH HOPPE PARTS

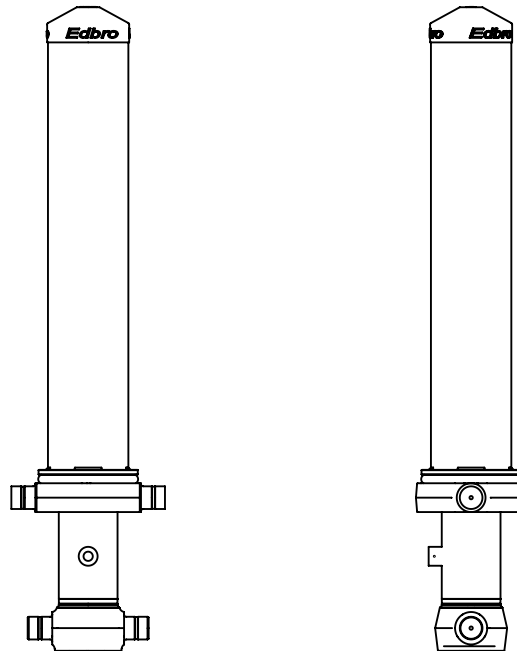

CS130045441B19A11