


Cylinder 4 stage front end with outer cover

****ALLOW 50mm TO REMOVE CAP FOR SERVICING**

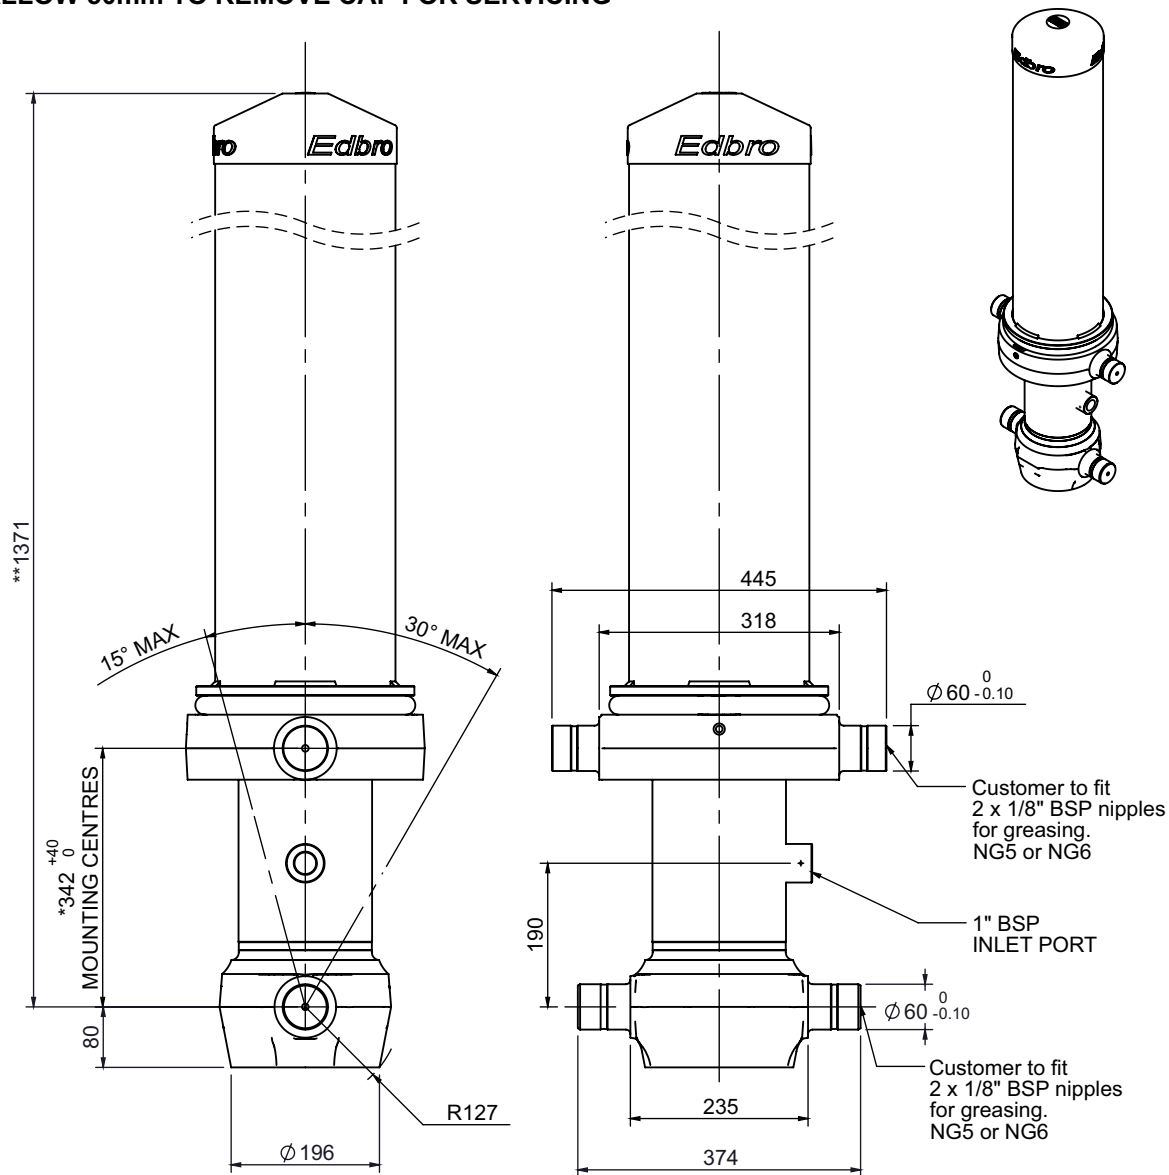

*Includes 11mm Pull Out.

CS150044406N19A11

SPECIFICATION

TIPPING CAPACITY : 37-56 TONNES***

Stage	Diameter	Length	Stroke	Swept Volume
-	-	-	-	-
OUTER COVER	239	990	-	-
0	177	1325	-	-
1	155	1290	1075	20
2	136	1290	1097	16
3	117	1290	1112	12
4	98	1290	1117	8
Total (+5/-10)			4401	56
Final stroke reduced by	0	Priming Volume		14
Cylinder Mass (Kg)	209	Total Volume (Litres)		70
Maximum Pressure (Bar)	190	Max. first stage thrust		230 KN

***TIPPING CAPACITY AT WORKING PRESSURE

Body Length (BL)		BODY LENGTH (BL)				OH
		5550	5800	6050		
40	46°	38	44°	37	42°	150
46	49°	44	47°	41	45°	450
56	52°	51	50°	48	47°	750

d = 178; r = 750; Working Pressure 165 bar

Tipping angle (T)

Body + payload mass, W (tonne)

NOTES

1. This cylinder is for lifting purposes only and side load conditions should be avoided
2. Cylinder is painted in primer to RAL9005

Edbro

Hoppe-Truck-Hydraulik GmbH & Co.KG
Püßelbürener Damm 244, 49479 Ibbenbüren
Tel.: +49 (0) 5451-50230320, Fax: +49 (0) 5451-50230348
Email: info@hoppe.parts Web: www.hoppe.parts

HTH HOPPE. PARTS