


Cylinder 4 stage front end with outer cover

****ALLOW 50mm TO REMOVE CAP FOR SERVICING**

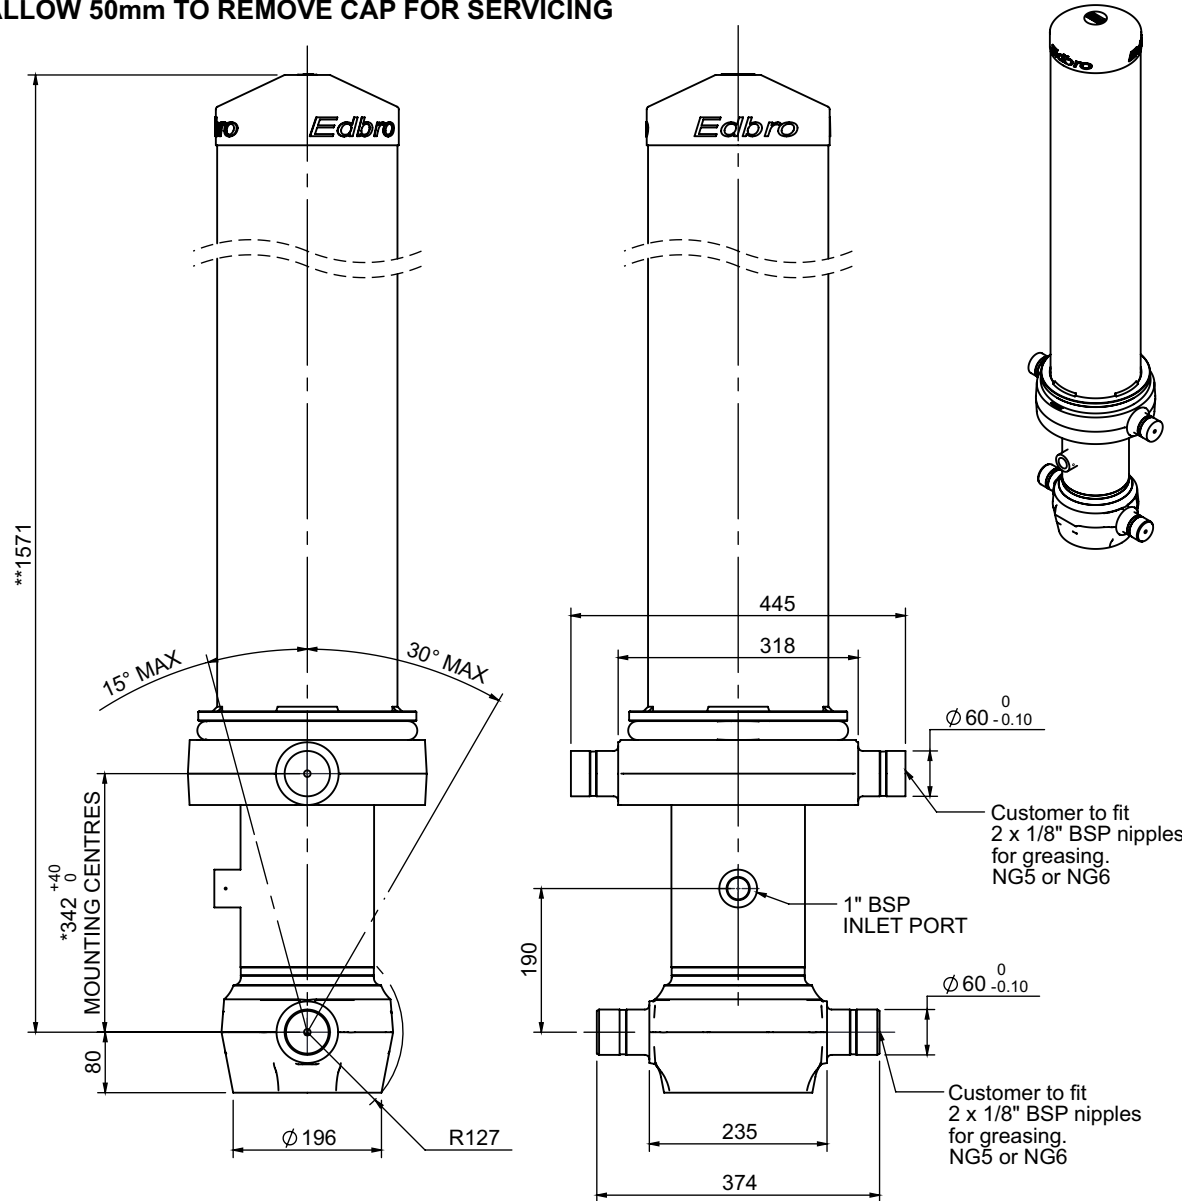

*Includes 11mm Pull Out

CS150045206B19A11

SPECIFICATION		TIPPING CAPACITY : 35-53 TONNES***		
Stage	Diameter	Length	Stroke	Swept Volume
-	-	-	-	-
OUTER COVER	239	1190	-	-
0	177	1525	-	-
1	155	1490	1275	24
2	136	1490	1297	19
3	117	1490	1312	14
4	98	1490	1317	10
Total (+5/-10)			5201	67
Final stroke reduced by	0	Priming Volume		17
Cylinder Mass (Kg)	232	Total Volume (Litres)		84
Maximum Pressure (Bar)	190	Max. first stage thrust		230 KN

***TIPPING CAPACITY AT WORKING PRESSURE

Body Length (BL)		BODY LENGTH (BL)				OH
		6250	6750	7250		
40	49°	37	45°	35	42°	150
45	51°	41	47°	38	44°	450
53	54°	46	50°	42	46°	750

d = 178; r = 750; Working Pressure 165 bar

Tipping angle (T)

Body + payload mass, W (tonne)

NOTES

1. This cylinder is for lifting purposes only and side load conditions should be avoided
2. Cylinder is painted in primer paint to RAL9005

Edbro

Hoppe-Truck-Hydraulik GmbH & Co.KG
Püßelbürener Damm 244, 49479 Ibbenbüren
Tel.: +49 (0) 5451-50230320, Fax: +49 (0) 5451-50230348
Email: info@hoppe.parts Web: www.hoppe.parts

HTH HOPPE. PARTS