


Cylinder 4 stage front end with Outer Cover

****ALLOW 50mm TO REMOVE
CAP FOR SERVICING**

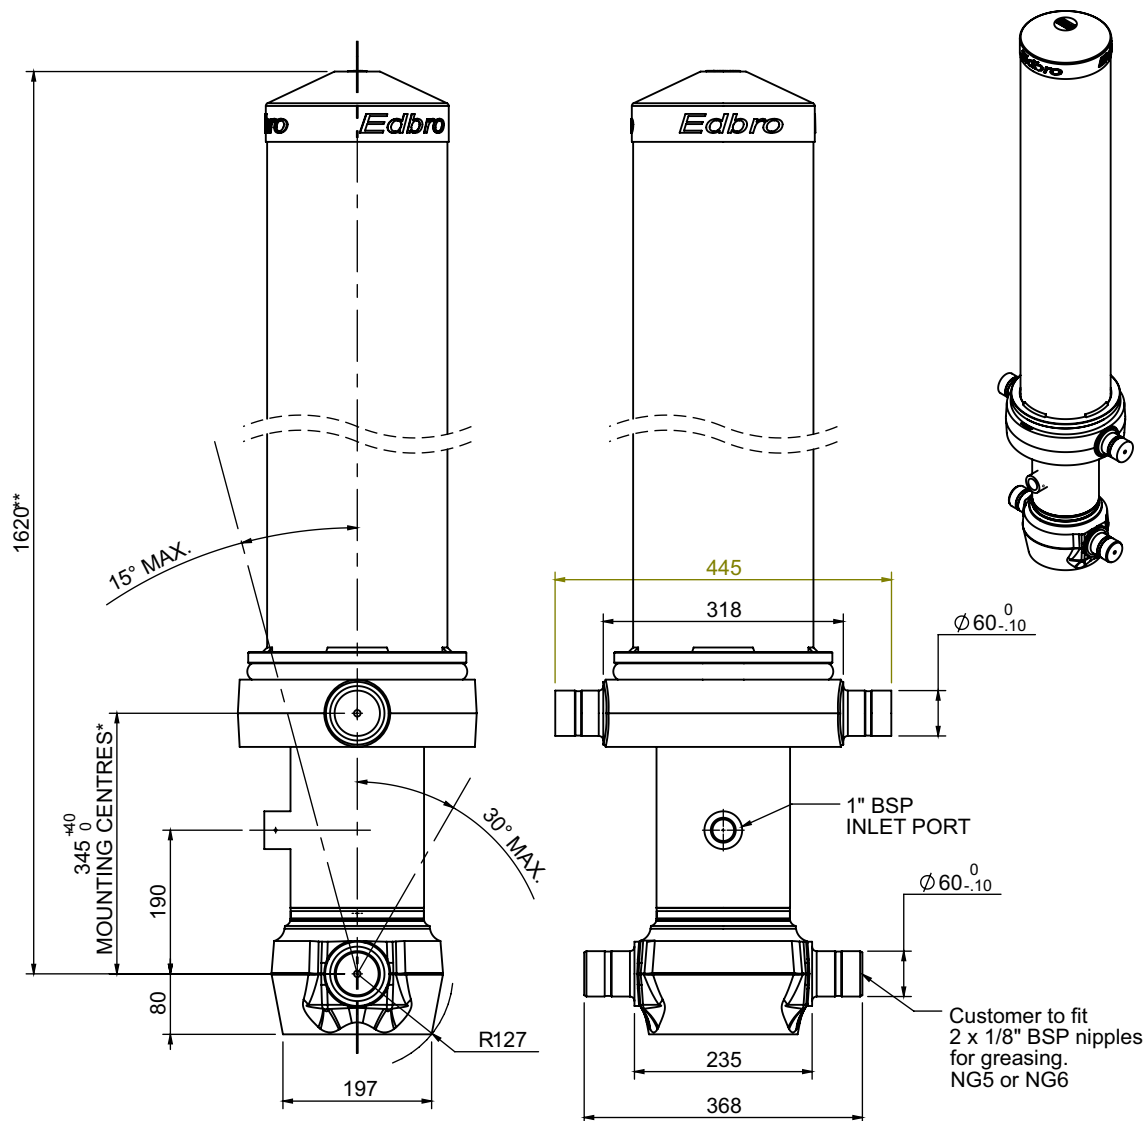

***Include 11mm Pull Out**

CS150045406B19A11


SPECIFICATION

RATED CAPACITY : 37-54 TONNES***

Stage	Diameter	Length	Stroke	Swept Volume
-	-	-	-	-
OUTER COVER	239	1240	-	-
0	177	1575	-	-
1	155	1540	1325	25
2	136	1540	1347	20
3	117	1540	1362	15
4	98	1540	1367	10
Final stroke reduced by	0	Total (+5/-10)	5401	70
Cylinder Mass (Kg)	243.08	Priming Volume	17.6	
Rated Pressure (Bar)	175	Total Volume (Litres)	87.6	
Maximum Pressure (Bar)	175	Max. first stage thrust	230 KN	

***TIPPING CAPACITY AT RATED PRESSURE

$d = 229$; $r = 750$



BODY LENGTH (BL)						OH
6500		7000		7500		
41	49°	39	45°	37	42°	150
47	51°	43	47°	40	44°	450
54	54°	48	50°	44	46°	750

Tipping angle (θ)
Body + payload mass, W (tonne)

NOTES

- If hydraulic pressure is used to limit overloading, the system relief valve must be set to the Rated Pressure unless agreed otherwise by Edbro
- The system relief valve can be set to Maximum Pressure if the load is limited by other means. See RATINGS page for advice
- This cylinder is for lifting purposes only and sildeload conditions must be avoided
- Cylinder is painted in primer paint to RAL9005

Edbro

Hoppe-Truck-Hydraulik GmbH & Co.KG
Püßelbürener Damm 244, 49479 Ibbenbüren
Tel.: +49 (0) 5451-50230320, Fax: +49 (0) 5451-50230348
Email: info@hoppe.parts Web: www.hoppe.parts

HTH HOPPE. PARTS