


Cylinder 5 stage front end with outer cover

**ALLOW 50mm TO REMOVE CAP FOR SERVICING

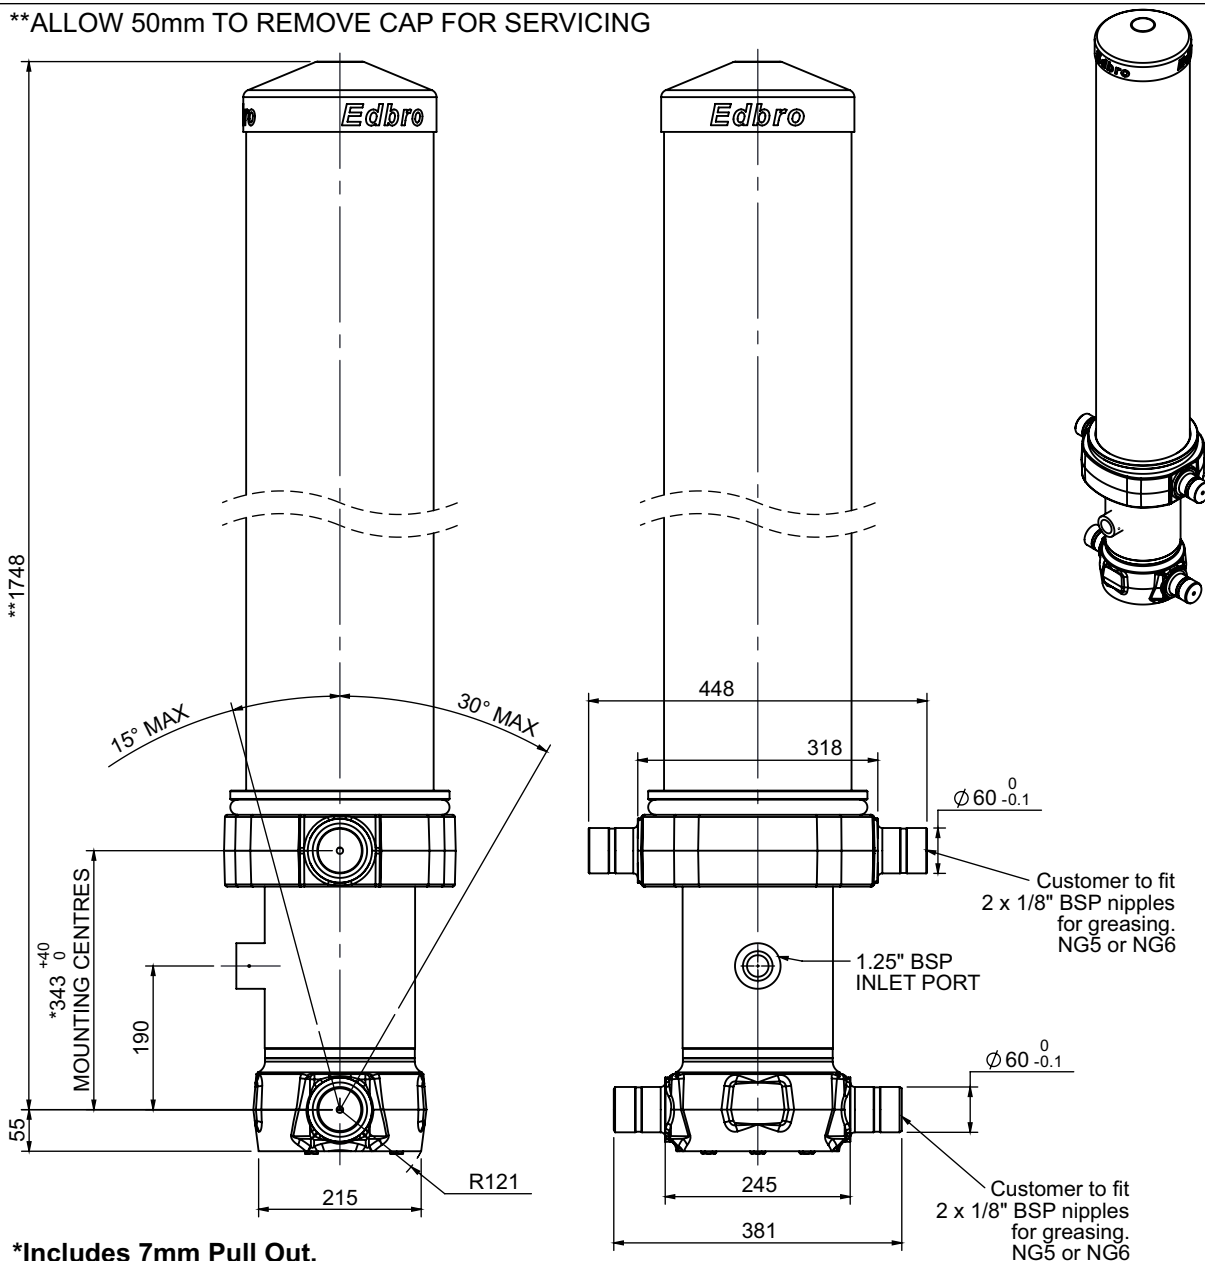

*Includes 7mm Pull Out.


CS17L057233B19A11

SPECIFICATION

TIPPING CAPACITY : 33-45 TONNES***

Stage	Diameter	Length	Stroke	Swept Volume
OUTER COVER	248	1370	-	-
0	199	1675	-	-
1	176	1640	1420	35
2	155	1640	1437	27
3	136	1640	1447	21
4	117	1640	1462	16
5	98	1640	1467	11
Total (+5/-10)			7233	110
Final stroke reduced by	0	Priming Volume		22.3
Cylinder Mass (Kg)	301	Total Volume (Litres)		132.3
Maximum Pressure (Bar)	190	Max. first stage thrust		200 KN

***TIPPING CAPACITY AT WORKING PRESSURE



BODY LENGTH (BL)						OH
8500		9000		9500		
37	50°	34	47°	33	45°	150
40	52°	37	49°	35	46°	450
45	54°	41	51°	38	48°	750

d = 229; r = 900; Working Pressure 150 bar

Tipping angle (T)
Body + payload mass, W (tonne)

NOTES

1. This cylinder is for lifting purposes only and side load conditions should be avoided
2. Cylinder is painted in primer paint to RAL9005

Edbro

Hoppe-Truck-Hydraulik GmbH & Co.KG
Püßelbürener Damm 244, 49479 Ibbenbüren
Tel.: +49 (0) 5451-50230320, Fax: +49 (0) 5451-50230348
Email: info@hoppe.parts Web: www.hoppe.parts

HTH HOPPE PARTS