


# Datasheet for Cylinder CS17L054833B19J11

5 stage lightweight cylinder with trunnion mount & outer cover

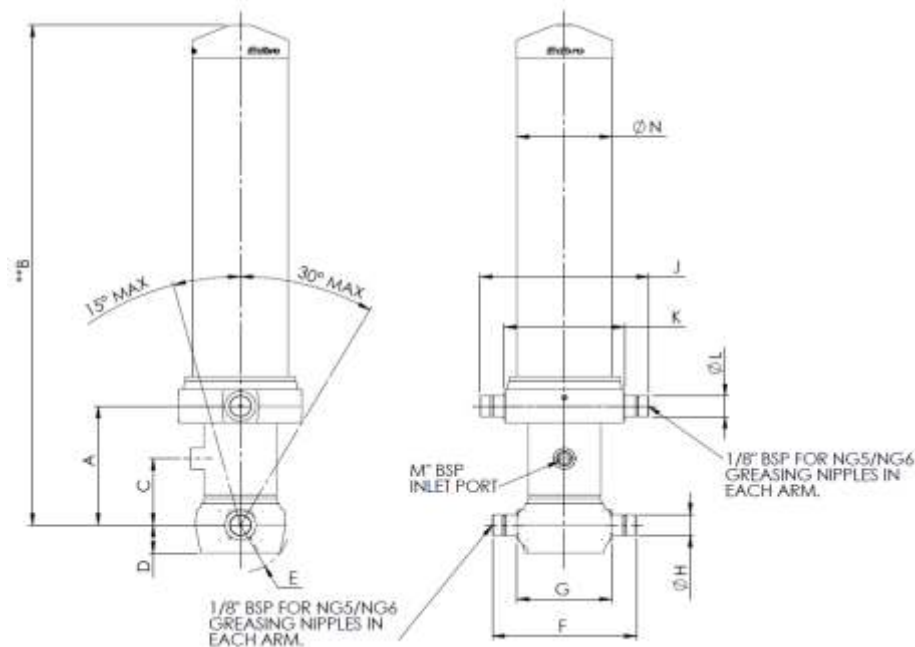

\*\* Allow 50mm to remove cap for servicing

Approx. weight 230kg

<

| APPLICATION INFORMATION  |     |     |                  |      |        |
|--------------------------|-----|-----|------------------|------|--------|
| Working Pressure         | 163 | bar | Swept Oil Volume | 76   | litres |
| Maximum Pressure         | 190 | bar | Priming Volume   | 17.2 | litres |
| Maximum 1st Stage Thrust | 265 | kN  | Total Volume     | 93.2 | litres |

| DIMENSIONS |      |    |   |     |    |    |                |    |    |                |    |    |     |    |
|------------|------|----|---|-----|----|----|----------------|----|----|----------------|----|----|-----|----|
| A          | 343  | mm | D | 55  | mm | G  | 245            | mm | K  | 318            | mm | ØN | 248 | mm |
| B          | 1359 | mm | E | 121 | mm | ØH | 60.00<br>59.90 | mm | ØL | 60.00<br>59.90 | mm |    |     |    |
| C          | 190  | mm | F | 381 | mm | J  | 448            | mm | M  | G1.1/4         |    |    |     |    |

| Notes |                                                                                                                                                                                                                                                                       |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1.    | This cylinder is intended for lifting purposes only and side load conditions should be avoided.                                                                                                                                                                       |
| 2.    | Cylinder is painted in primer to RAL9005                                                                                                                                                                                                                              |
| 3.    | Refer to <a href="http://www.edbro.com">www.edbro.com</a> for:- <ul style="list-style-type: none"> <li>Bracket details</li> <li>Installation instructions that must be observed</li> <li>Correct oil selection</li> <li>An explanation of tipping capacity</li> </ul> |

**Edbro**

Hoppe-Truck-Hydraulik GmbH & Co.KG  
Püßelbürener Damm 244, 49479 Ibbenbüren  
Tel.: +49 (0) 5451-50230320, Fax: +49 (0) 5451-50230348  
Email: [info@hoppe.parts](mailto:info@hoppe.parts) Web: [www.hoppe.parts](http://www.hoppe.parts)

**HTH HOPPE** PARTS