


Cylinder 5 stage front end with outer cover

**ALLOW 50mm TO REMOVE CAP FOR SERVICING

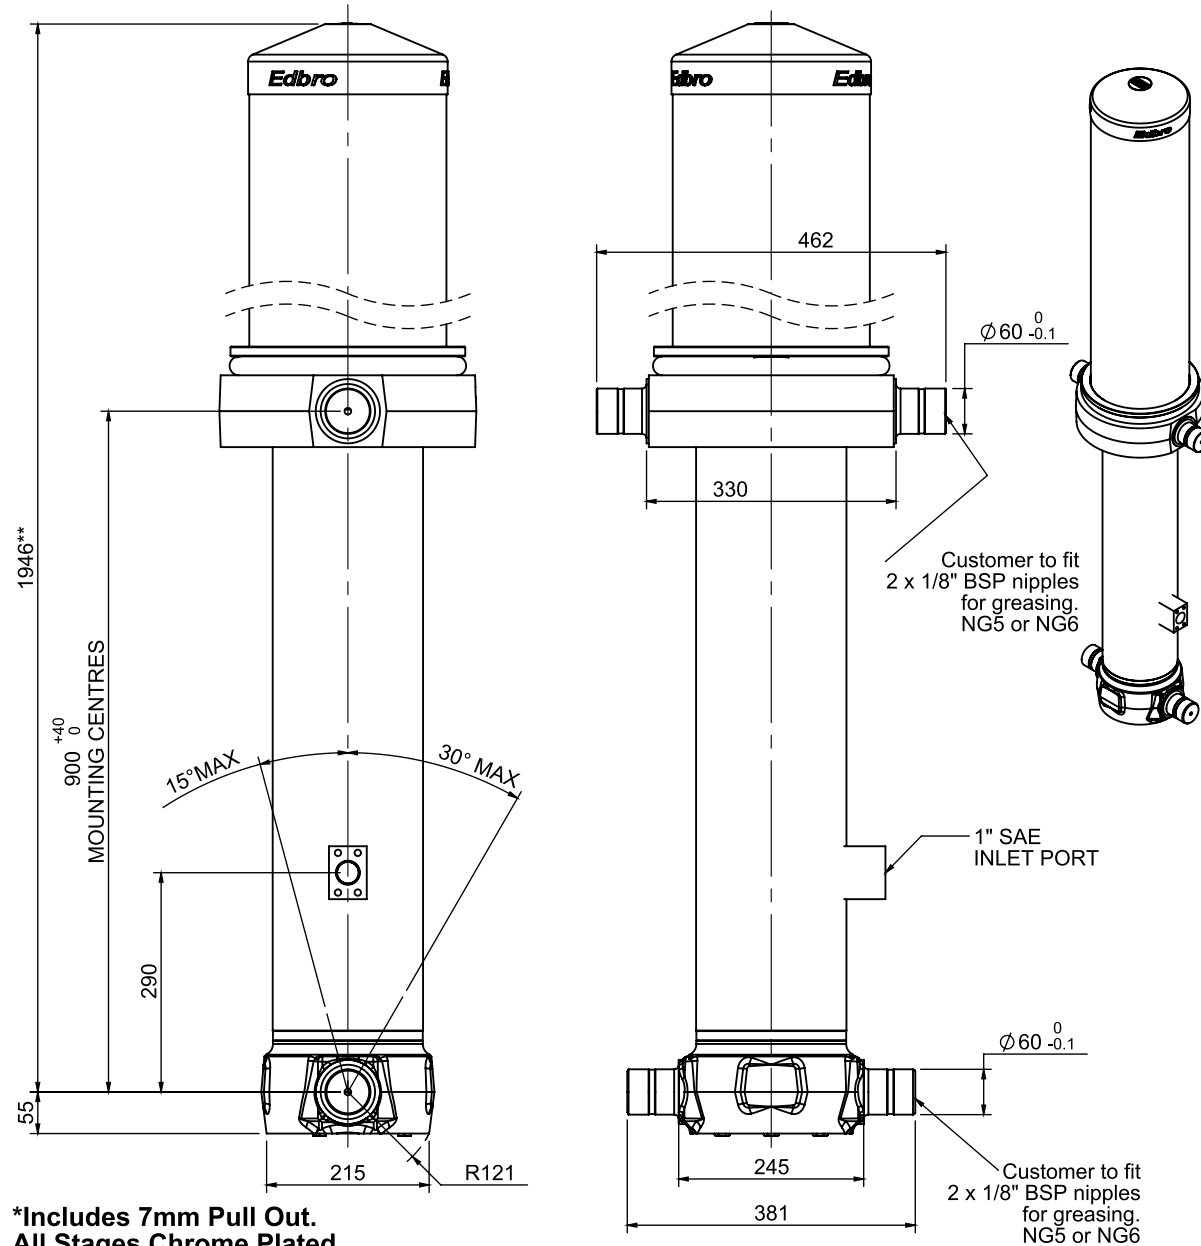

*Includes 7mm Pull Out.
All Stages Chrome Plated


CS17L058233R29A14CR

SPECIFICATION

TIPPING CAPACITY : 25 - 31TONNES***

Stage	Diameter	Length	Stroke	Swept Volume
OUTER COVER	261	1010	-	-
0	199	1875	-	-
1	176	1840	1620	39
2	155	1840	1637	31
3	136	1840	1647	24
4	117	1840	1662	18
5	98	1840	1667	13
Total (+5/-10)			8233	125
Final stroke reduced by	0	Priming Volume		25.3
Cylinder Mass (Kg)	328	Total Volume (Litres)		150.3
Maximum Pressure (Bar)	190	Max. first stage thrust		200 KN

***TIPPING CAPACITY AT WORKING PRESSURE



BODY LENGTH (BL)						OH
10000		10500		11000		
27	49°	26	46°	25	44°	150
29	50°	28	48°	27	45°	450
31	52°	30	49°	28	47°	750

d = 229; r = 900; Working Pressure 120 bar

Tipping angle (theta)

Body + payload mass, W (tonne)

For guidance only;

Higher working pressures and tipping capacities may be possible.

To check your application email - applications@edbro.co.uk


NOTES

1. This cylinder is for lifting purposes only and side load conditions should be avoided
2. Cylinder is painted in primer to RAL9005
3. Refer to www.edbro.com for;-
 - Bracket details
 - Installation instructions that must be observed
 - Correct oil selection
 - An explanation of tipping capacity

Edbro

Hoppe-Truck-Hydraulik GmbH & Co.KG
Püßelbürener Damm 244, 49479 Ibbenbüren
Tel.: +49 (0) 5451-50230320, Fax: +49 (0) 5451-50230348
Email: info@hoppe.parts Web: www.hoppe.parts

HTH HOPPE PARTS

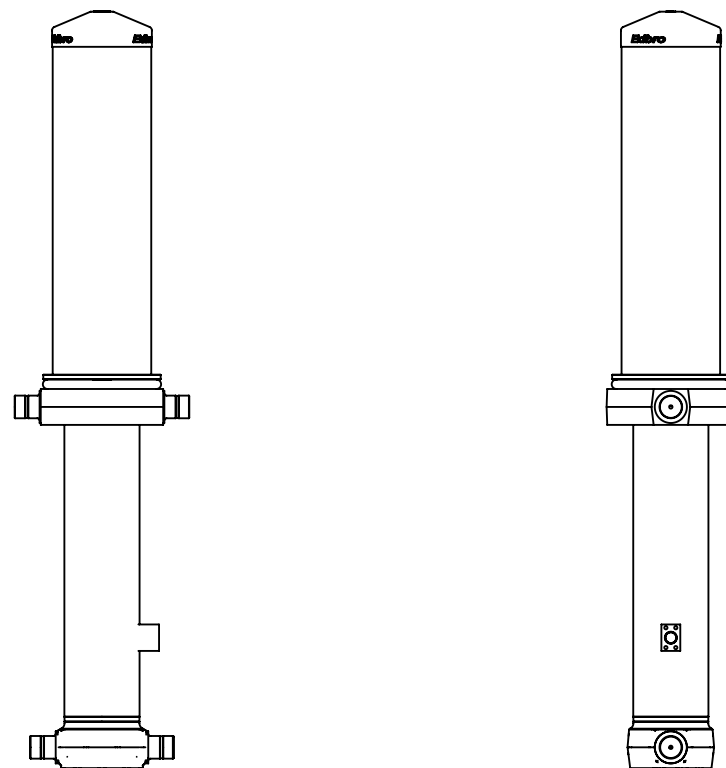

CS17L058233R29A14CR