


Cylinder 5 stage front end with outer cover

**ALLOW 50mm TO REMOVE CAP FOR SERVICING

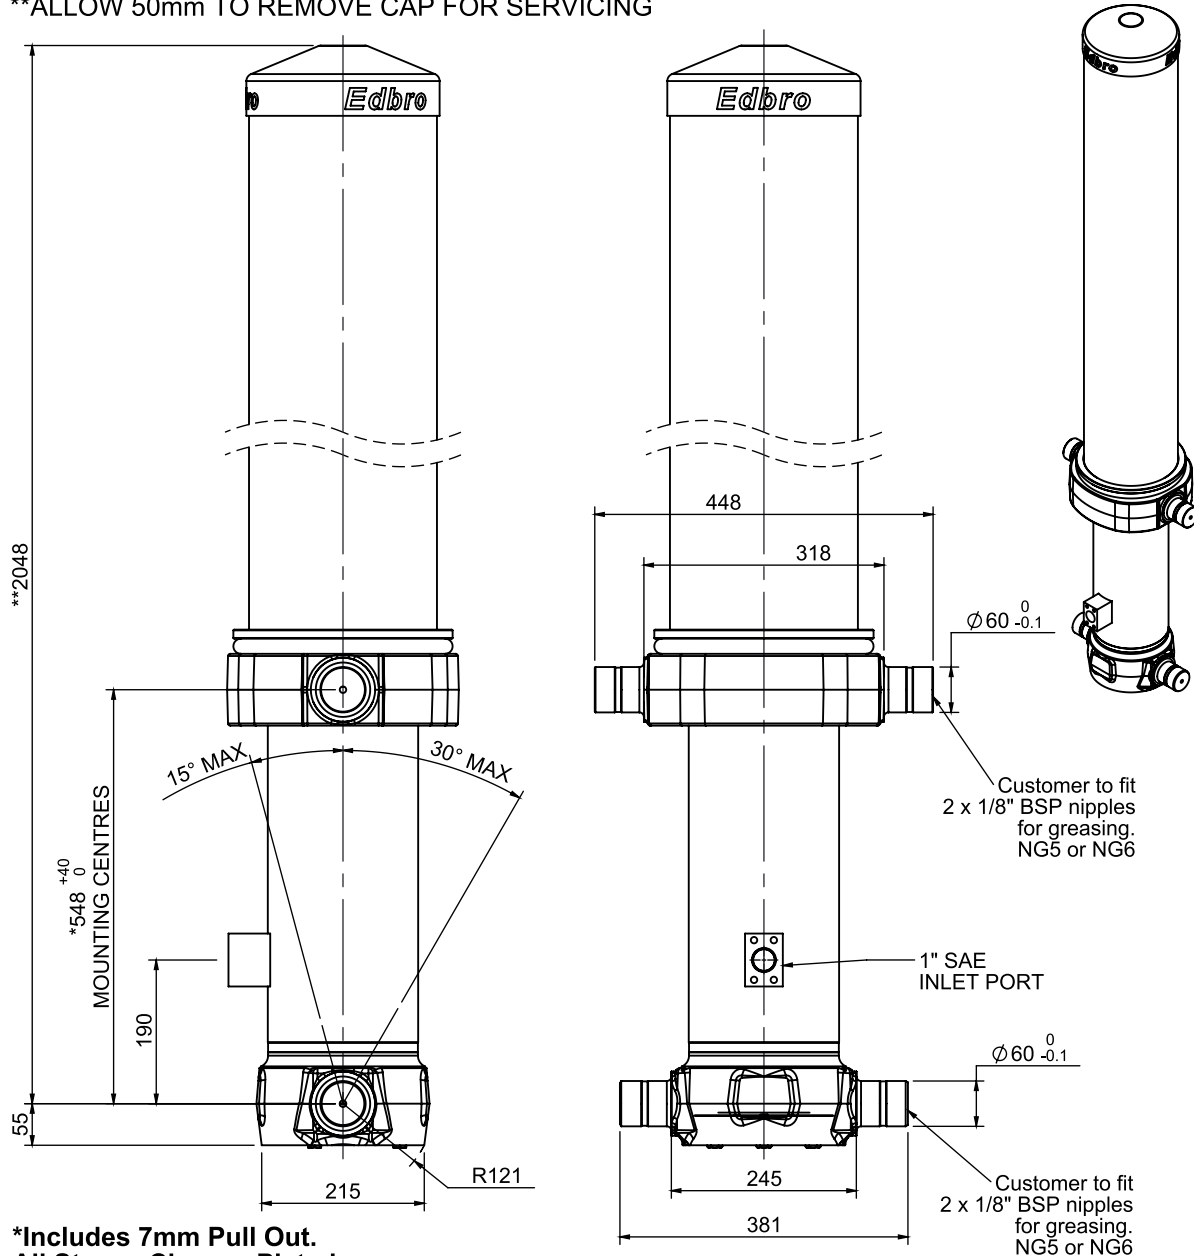

*Includes 7mm Pull Out.
All Stages Chrome Plated


CS17L058233S19L12C

SPECIFICATION

TIPPING CAPACITY : 34-45 TONNES***

Stage	Diameter	Length	Stroke	Swept Volume
OUTER COVER	248	1465	-	-
0	199	1975	-	-
1	176	1940	1720	42
2	155	1940	1737	33
3	136	1940	1747	25
4	117	1940	1762	19
5	98	1940	1267	10
Total (+5/-10)			8233	129
Final stroke reduced by	500	Priming Volume		26.8
Cylinder Mass (Kg)	346	Total Volume (Litres)		155.8
Maximum Pressure (Bar)	190	Max. first stage thrust		200 KN

***TIPPING CAPACITY AT WORKING PRESSURE



BODY LENGTH (BL)						OH
9500		10000		10500		
38	51°	35	49°	34	46°	150
41	53°	38	50°	36	48°	450
45	55°	42	52°	39	49°	750

d = 229; r = 900; Working Pressure 150 bar

For guidance only;

Higher working pressures and tipping capacities may be possible.

To check your application email - applications@edbro.co.uk


NOTES

1. This cylinder is for lifting purposes only and side load conditions should be avoided
2. Cylinder is painted in primer to RAL9005
3. Refer to www.edbro.com for;-
 - Bracket details
 - Installation instructions that must be observed
 - Correct oil selection
 - An explanation of tipping capacity

Edbro

Hoppe-Truck-Hydraulik GmbH & Co.KG
Püßelbürener Damm 244, 49479 Ibbenbüren
Tel.: +49 (0) 5451-50230320, Fax: +49 (0) 5451-50230348
Email: info@hoppe.parts Web: www.hoppe.parts

HTH HOPPE PARTS

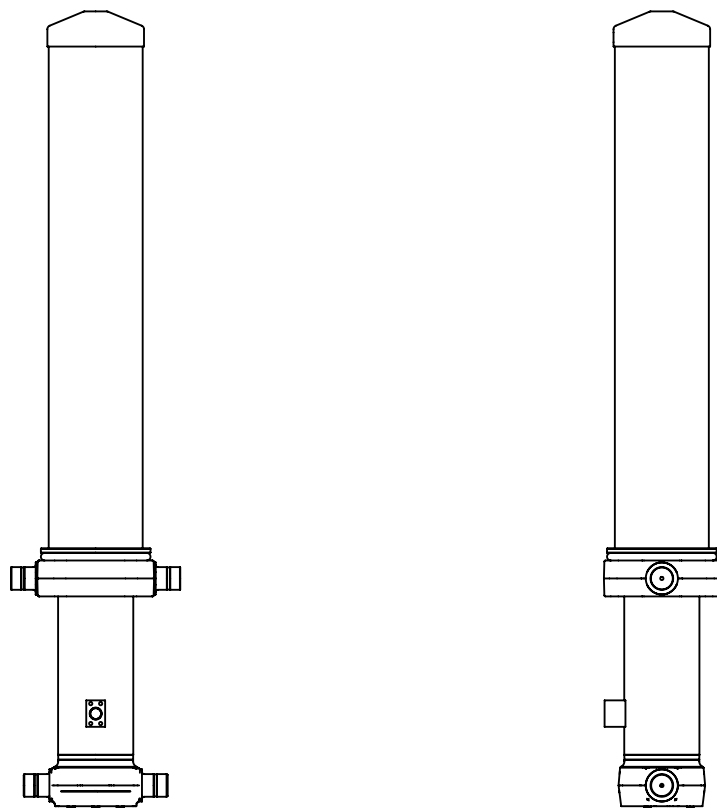

CS17L058233S19L12C