


Cylinder 5 stage front end with plain eye

CS17LE55233B70A02

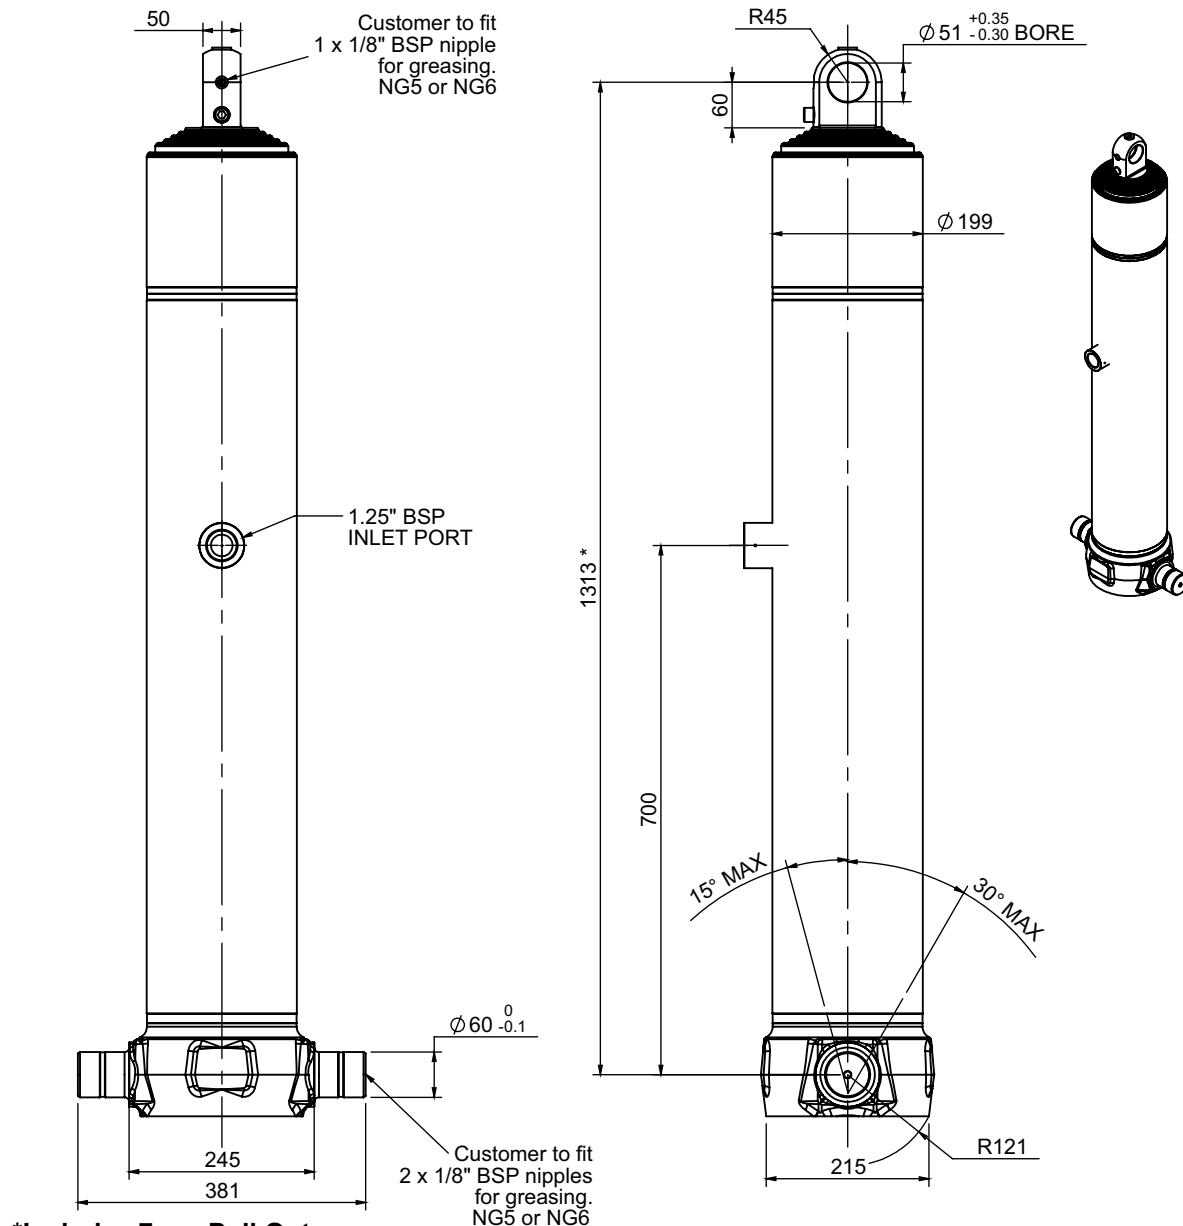

*Includes 7mm Pull Out.

SPECIFICATION

TIPPING CAPACITY : 39-57 TONNES***

Stage	Diameter	Length	Stroke	Swept Volume
-	-	-	-	-
0	199	1275	-	-
1	176	1240	1020	25
2	155	1240	1037	20
3	136	1240	1047	15
4	117	1240	1062	11
5	98	1240	1067	8
Total (+5/-10)			5233	79
Final stroke reduced by	0	Priming Volume		17.8
Cylinder Mass (Kg)	182	Total Volume (Litres)		96.8
Maximum Pressure (Bar)	190	Max. first stage thrust		265 kN

***TIPPING CAPACITY AT WORKING PRESSURE

The diagram illustrates the geometry of a crane boom. It shows a horizontal boom of length BL. A hook is positioned at a distance L from the center of the boom, where L = BL/2 - OH. The boom has a diameter d. The body and payload mass W act downwards from the center of the boom. The hook is offset by OH from the end of the boom. The tipping angle T is shown at the end of the boom.

BODY LENGTH (BL)						OH
6700		7050		7400		
43	48°	41	45°	39	43°	150
49	51°	45	48°	43	45°	450
57	53°	52	50°	48	47°	750

d = 0; r = 900; Working Pressure 185 bar

— Tipping angle (T)
 — Body + payload mass, W (tonne)

NOTES

1. This cylinder is for lifting purposes only and side load conditions should be avoided
2. Cylinder is painted in primer to RAL9005

Edbro

Hoppe-Truck-Hydraulik GmbH & Co.KG
Püßelbürener Damm 244, 49479 Ibbenbüren
Tel.: +49 (0) 5451-50230320, Fax: +49 (0) 5451-50230348
Email: info@hoppe.parts Web: www.hoppe.parts

HTH HOPPE PARTS