


Cylinder 5 stage front end with spherical eye

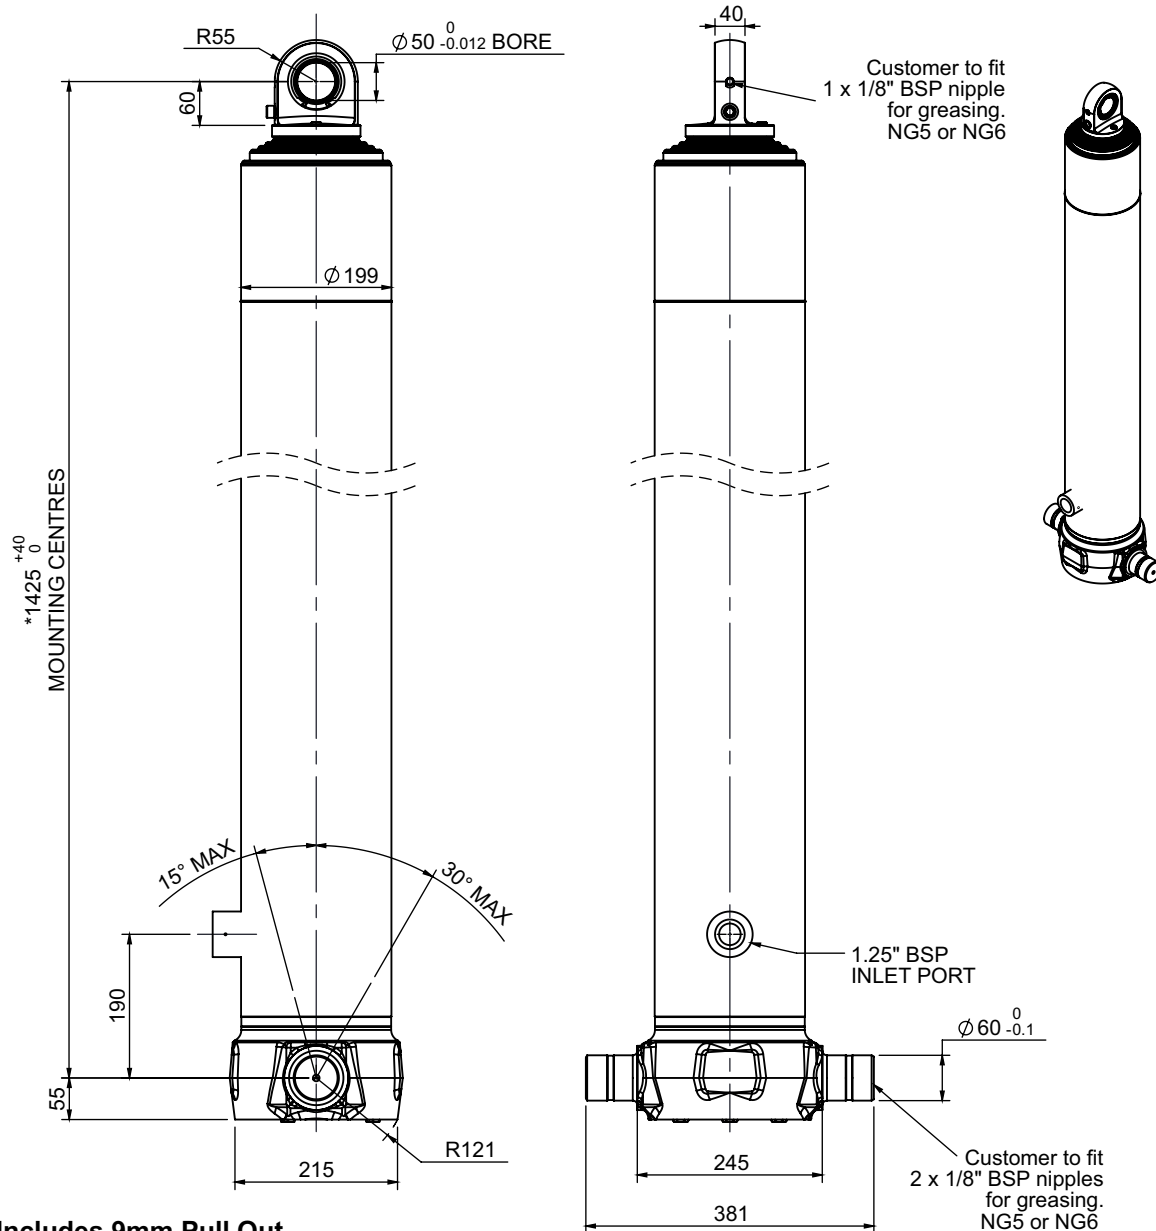

*Includes 9mm Pull Out.

CS17LS55733B19A02

SPECIFICATION

TIPPING CAPACITY : 31-46 TONNES***

Stage	Diameter	Length	Stroke	Swept Volume
-	-	-	-	-
0	199	1375	-	-
1	176	1340	1118	27
2	155	1340	1137	21
3	136	1340	1147	17
4	117	1340	1162	12
5	98	1340	1167	9
Total (+5/-10)			5731	86
Final stroke reduced by	0	Priming Volume		17.8
Cylinder Mass (Kg)	198	Total Volume (Litres)		103.8
Maximum Pressure (Bar)	190	Max. first stage thrust		200 KN

***TIPPING CAPACITY AT WORKING PRESSURE

						BODY LENGTH (BL)			OH
						7250	7750	8250	
35	49°	33	45°	31	42°	150			
40	51°	36	47°	34	44°	450			
46	54°	41	49°	37	46°	750			

d = 0; r = 900; Working Pressure 150 bar

Tipping angle (T)

Body + payload mass, W (tonne)


NOTES

1. This cylinder is for lifting purposes only and side load conditions should be avoided
2. Cylinder is painted in primer to RAL9005

Edbro

Hoppe-Truck-Hydraulik GmbH & Co.KG
Püßelbürener Damm 244, 49479 Ibbenbüren
Tel.: +49 (0) 5451-50230320, Fax: +49 (0) 5451-50230348
Email: info@hoppe.parts Web: www.hoppe.parts

HTH HOPPE PARTS

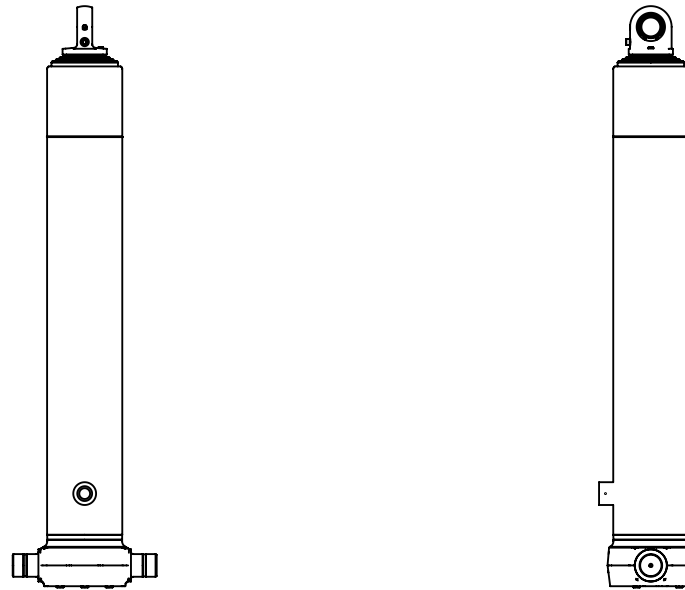

CS17LS55733B19A02