


Cylinder 5 stage front end with outer cover

** ALLOW 50mm TO REMOVE CAP FOR SERVICING

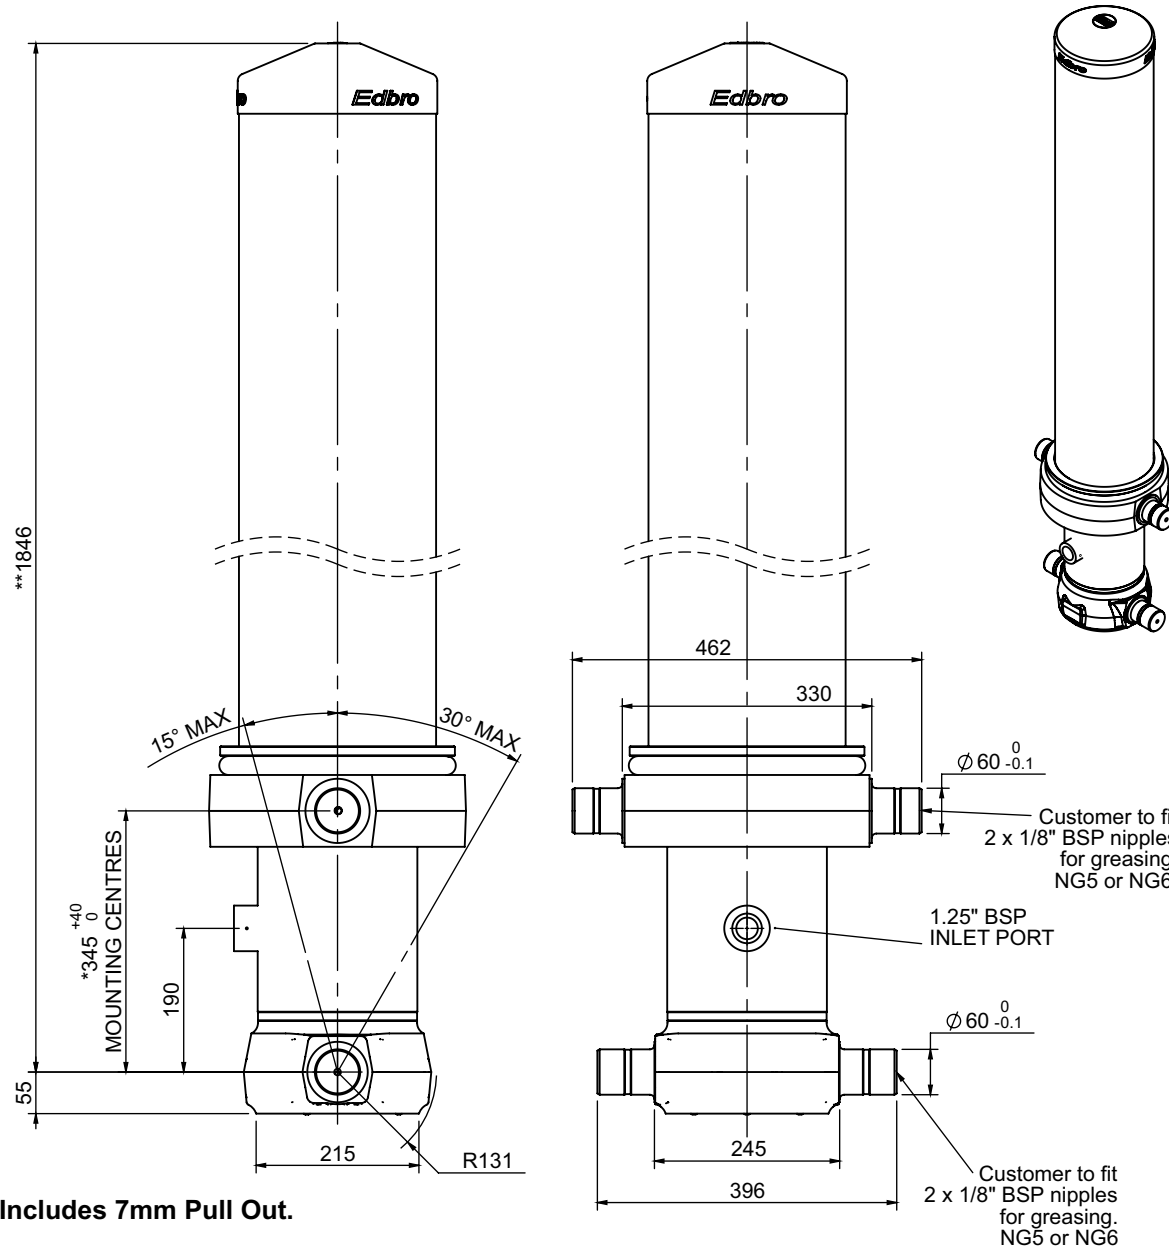

*Includes 7mm Pull Out.


CS18L057733B19A11

SPECIFICATION

TIPPING CAPACITY : 34-45 TONNES***

Stage	Diameter	Length	Stroke	Swept Volume
OUTER COVER	261	1465	-	-
0	211	1775	-	-
1	188	1740	1520	42
2	167	1740	1537	34
3	147	1740	1547	26
4	127	1740	1562	20
5	105	1740	1567	14
		Total (+5/-10)	7733	136
Final stroke reduced by		0	Priming Volume	25.1
Cylinder Mass (Kg)		369	Total Volume (Litres)	161.1
Maximum Pressure (Bar)		190	Max. first stage thrust	200 KN

***TIPPING CAPACITY AT WORKING PRESSURE

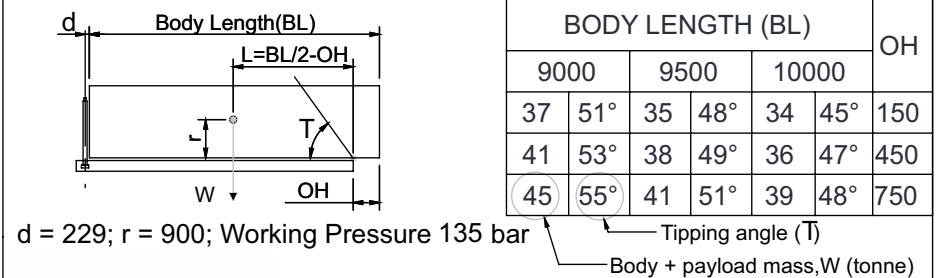

NOTES

1. This cylinder is for lifting purposes only and side load conditions should be avoided
2. Cylinder is painted in primer to RAL9005

Edbro

Hoppe-Truck-Hydraulik GmbH & Co.KG
Püßelbürener Damm 244, 49479 Ibbenbüren
Tel.: +49 (0) 5451-50230320, Fax: +49 (0) 5451-50230348
Email: info@hoppe.parts Web: www.hoppe.parts

HTH HOPPE PARTS